



PERLA OP 1.00

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS

PERLA OP 1.00






Recycled Content

Light Reflectance

VOC A+

PERLA OP 1.00

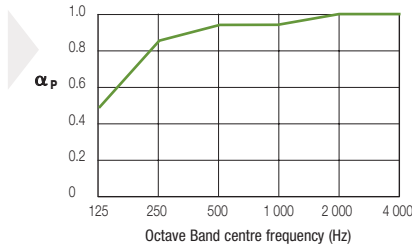
	BOARD	TEGULAR	MICROLOOK 90
	 Prelude 24 - XL²/TLX Prelude 24 Sixty² - XL²/TLX	 Prelude 24 - XL²/TLX Prelude 24 Sixty² - XL²/TLX	 Prelude 15 - XL²/TL Silhouette 6mm - XL² Interlude HRC - XL²
			
Tiles			
600 x 600 x 20 mm	3861 M	3866 M	2097 M4
675 x 675 x 20 mm	3862 M	3867 M	2098 M4
1200 x 600 x 20 mm	3863 M		



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
1.00	0.95	0.50	0.85	0.95	0.95	1.00	1.00	α_p

Sound Absorption Class = A



EN ISO 10848-2
& EN ISO 717-1

D_{nfw}
25 dB



EN ISO 140-3
& EN ISO 717-1

R_w
12 dB



EEA	Euroclass A2-s1,d0
EN 13501-1	

RUS	KM1 (G1, V1, D1, T1)
FZ 123	



EN 12667
& ISO 8301

$\lambda = 0.037 \text{ W/m K}$



ISO 14644-1

ISO 5



95 % RH



15 YEAR
guarantee



30 YEAR
system
guarantee



3.4 kg/m²

Please contact Armstrong Technical Sales Group for further details.

www.armstrongceilings.eu